





44 Lever Bypass Multi-Position Meter Main



200 Amps per Position | 5 Terminals | 120/240 VAC





5972

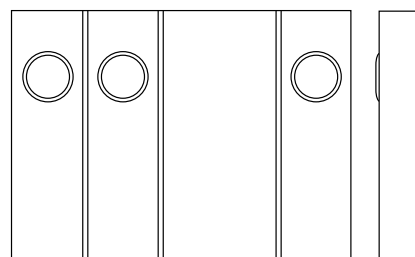

5973

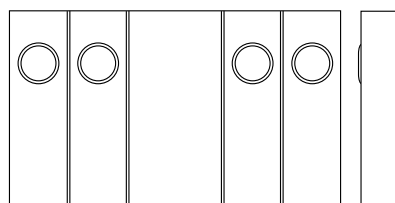

5974

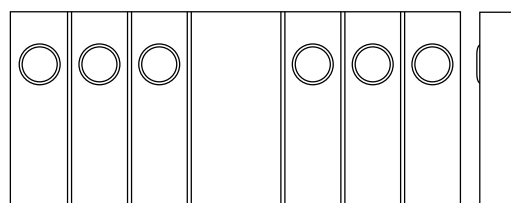

5976

Bus Chart

Catalog Number	Amp
U5972-XT-5T9-AMS	320
U5973-XT-5T9-AMS	450
U5974-XT-5T9-AMS	640
U5975-XT-5T9-AMS	640
U5976-XT-5T9-AMS	640


200 Amps per Position | 5 Terminals | Multi-Position Meter Main | Ringless

Catalog Number	Positions	Service	Hub	Connectors CU/AL		Dimensions			Knockouts			
				Line	Load	D"	W"	H"	1	2	3	4
U5972-XT-5T9	2	OH/UG	(2) C.P.	3/8" x 16 Studs*	C.B	5 ³¹ / ₃₂	36 ³ / ₈	34	4	2 ¹ / ₂	1	1/2
U5973-XT-5T9	3	OH/UG	(2) C.P.	3/8" x 16 Studs*	C.B	5 ³¹ / ₃₂	46 ¹ / ₂	34	4	2 ¹ / ₂	1	—
U5974-XT-5T9	4	OH/UG	(2) C.P.	3/8" x 16 Studs*	C.B	5 ³¹ / ₃₂	57 ¹ / ₁₆	34	4	2 ¹ / ₂	1	—
U5975-XT-5T9	5	OH/UG	(2) C.P.	3/8" x 16 Studs*	C.B	5 ³¹ / ₃₂	67 ¹ / ₈	34	4	2 ¹ / ₂	1	—
U5976-XT-5T9	6	OH/UG	(2) C.P.	3/8" x 16 Studs*	C.B	5 ³¹ / ₃₂	77 ⁹ / ₁₆	34	4	2	1	—

Notes

- All products are NEC 2020 compliant
- **AIC Rating:** All models are rated 22K AIC.
- **Hub:** Units supplied with two closing plates. Order hubs separately from the chart below.
- **Lug Kits:** Sold separately.
- **Front Covers:** Barrel lock option available - contact factory.

Hub Chart

					
A8110	3" hub	A8111	3 ¹ / ₂ " hub	A8112	4" hub

Breaker Chart

Rating kAIC	Circuit Breakers 125 Amps
10	Siemens: QP. Cutler Hammer: BR, HQP, QPGF Square D/Homeline: GE (50 Amps max) THQL, THQL-GF
22	Siemens: QPH
Rating kAIC	150-200 Amps
10	Siemens: QN
22	Siemens: QNH



Please consult serving utility for their requirements prior to ordering or installing, as specifications and approvals vary by utility, and may require local electrical inspector approval. All installations must be installed by a licensed electrician and must comply with all national and local codes, laws and regulations. Milbank reserves the right to make changes in specifications and features shown without notice or obligation.