



LED efficiency and performance in an economical 2'x4' center basket troffer. Includes built in support for Lightcloud, a wireless lighting control system fully developed and supported by RAB.

Color: White

Weight: 24.5 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.43A
208V	0.25A
240V	0.21A
277V	0.18A
Input Watts	50.8W

LED Info

Watts	49W
Color Temp	4000K (Neutral)
Color Accuracy	85 CRI
L70 Lifespan	100,000 Hours
Lumens	7,187 lm
Efficacy	141.5 lm/W

Technical Specifications

Compliance

UL Listed:

Suitable for damp locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

DLC Listed:

This product is listed by Design Lights Consortium (DLC) as an ultra-efficient premium product that qualifies for the highest tier of rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PK962EZ5

Electrical

Driver:

Class 2, Constant Current, 120-277V, 50/60Hz, 120V: 0.43A, 208V: 0.25A, 240V: 0.21A, 277V: 0.18A

Dimming Driver:

Driver includes dimming control wiring for 0-10V dimming systems. Requires separate 0-10V DC dimming circuit. Dims down to 10%.

THD:

4.04% at 120V, 8.62% at 277V

Power Factor:

99.8% at 120V, 97.5% at 277V

Surge Protection:

2.5kV

Construction

Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

Ambient Temperature:

Suitable for use in up to 40°C (104°F)

IC Rated:

Suitable for direct contact with insulation

Housing:

Die-formed, 20-gauge, cold-rolled steel

Mounting:

Integral T-grid clips make installation easy and secure

Reflector:

High-reflectance, powder-coated finish, optimized for uniform light distribution

Lens:

Snap-in, frosted polycarbonate lens

Finish:

Formulated for high durability and long-lasting color

Green Technology:

Mercury and UV free. RoHS-compliant components.

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Color Stability:

LED color temperature is warrantied to shift no more than 200K in color temperature over a 5-year period

Color Uniformity:

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Performance

Lifespan:

100,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

Technical Specifications (continued)

Other

Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.


Patents:

This design is protected by patents pending in US, Canada, China, Taiwan and Mexico

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Dimensions

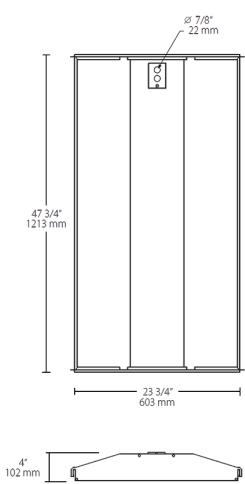

Features

Ultra-efficient performance with DLC Premium listing
Optional surface mount and drywall frame kits available
Optional programmable occupancy sensor for multi-level lighting control
0-10V dimming, standard on all models
100,000-hour LED lifespan 5-Year, No-Compromise Warranty

Ordering Matrix

Family	Size	Wattage	Color Temp	Driver	Options	Chicago Penum
SWISH	2X4	49	N	/D10		
	2X4 = 2' x 4'	19 = 19W (2x2)	Blank = 5000K Cool	/D10 = 0-10V Dimming	Blank = No Option	Blank = Standard
	2X2 = 2' x 2'	29 = 29W (2x2)	N = 4000K Neutral		/E2 = Battery Backup	/CP = Chicago Plenum
		39 = 39W (2x4)	YN = 3500K Warm		/LC = Lightcloud Controller	
		49 = 49W (2x4)	Neutral		/LC/E2 = Lightcloud Controller w/	
			Y = 3000K Warm		Battery Backup	
					/MVS = Microwave Occupancy Sensor	
					/MVS/E2 = Microwave Occupancy	
					Sensor w/ Battery Backup	

