

Our Standard Wall Mount Rack is designed perfectly for easy access to the side and rear of equipment. This rack is ideal for equipment Retail locations, classrooms, and other areas with limited floor space. This cabinet has a load capacity of 100lbs, made from heavy duty steel and a powder-coated finish.

Rack mount spaces are marked with permanent ink and all rails come standard with 12-24 threads.




Features

- Swings away from wall to allow east back door access to equipment
- Ships fully assembled for fast installation

SPECIFICATIONS

Description	Swing Rack, 19" EIA Rack Mount with Removable/Swinging Rack Frame		
Use	Indoor Use Only		
Available Sizes (See Details)		Usable	Overall Size
	• Height:	RU (12 / 18 / 24)	26.75" / 37.25" / 47.75"
	• Width:	19" EIA rack mount	21.125"
	• Depth:	10" / 16" / 22"	12" / 18" / 24"
Load Capacity	100lbs		
Material	Steel Rack Frame, machined aluminum corner blocks		
Construction	Assembled Rack Frame, Assembled Back Wall Frame, Machined Corner Blocks		
Finish	Powder coat paint		

Details

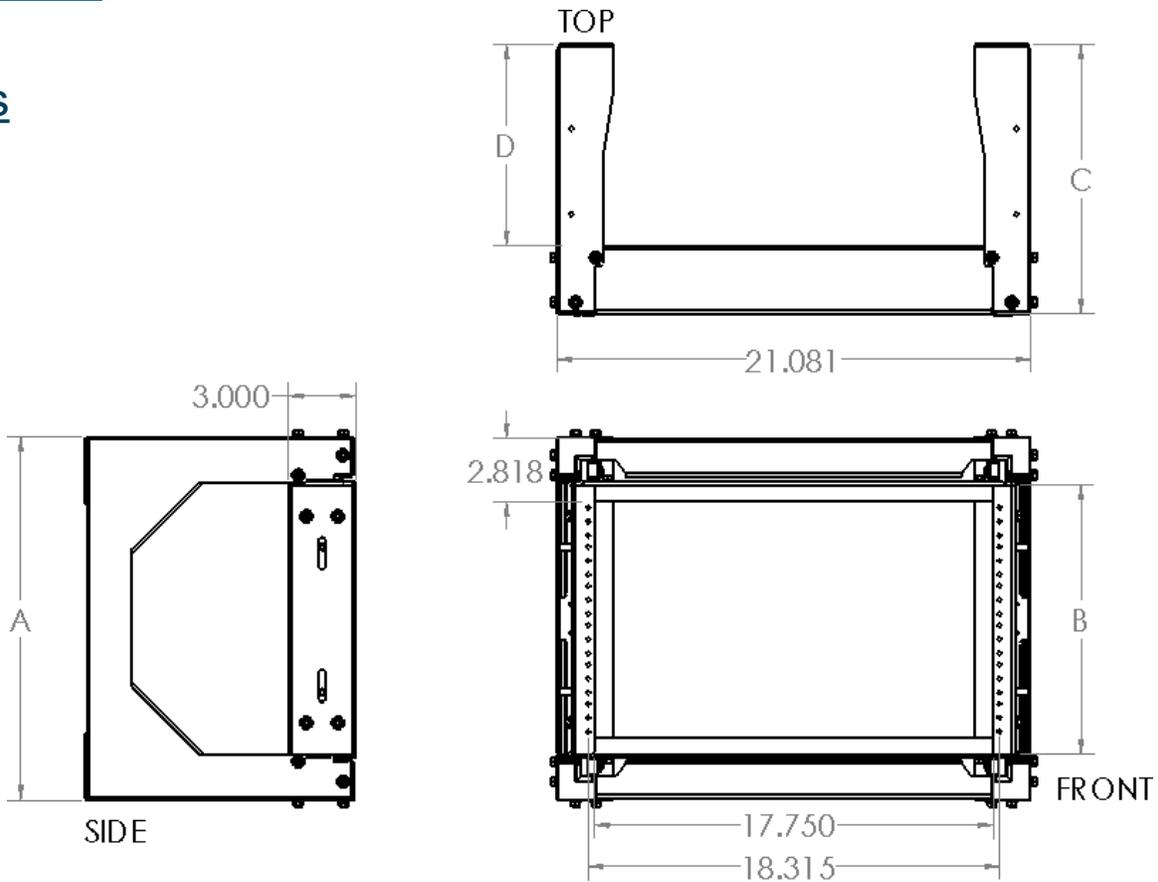

Dimension A: The amount of Rack Units (RU/U). Each RU is 1.75".

Dimension B: The overall Height of the rack top to bottom.

Dimension C: The overall Depth of the rack.

Dimension D: The usable top access Depth of the rack.


Rail Frame

- Rack Unit spacing with #12-24 Threaded Holes
- 19"EIA rack spacing, (18.315" Hole-to-Hole, 17.75" Front Clearance, 19" Back Clearance)
- Frame swings from corner pins allowing rear access.
- Swings both directions and can be separated from the Back Wall Frame.


Wall Frame

- Easily mounted to the wall with teardrop shaped mounting holes.
- Mounting hardware not included.

Components and Accessories

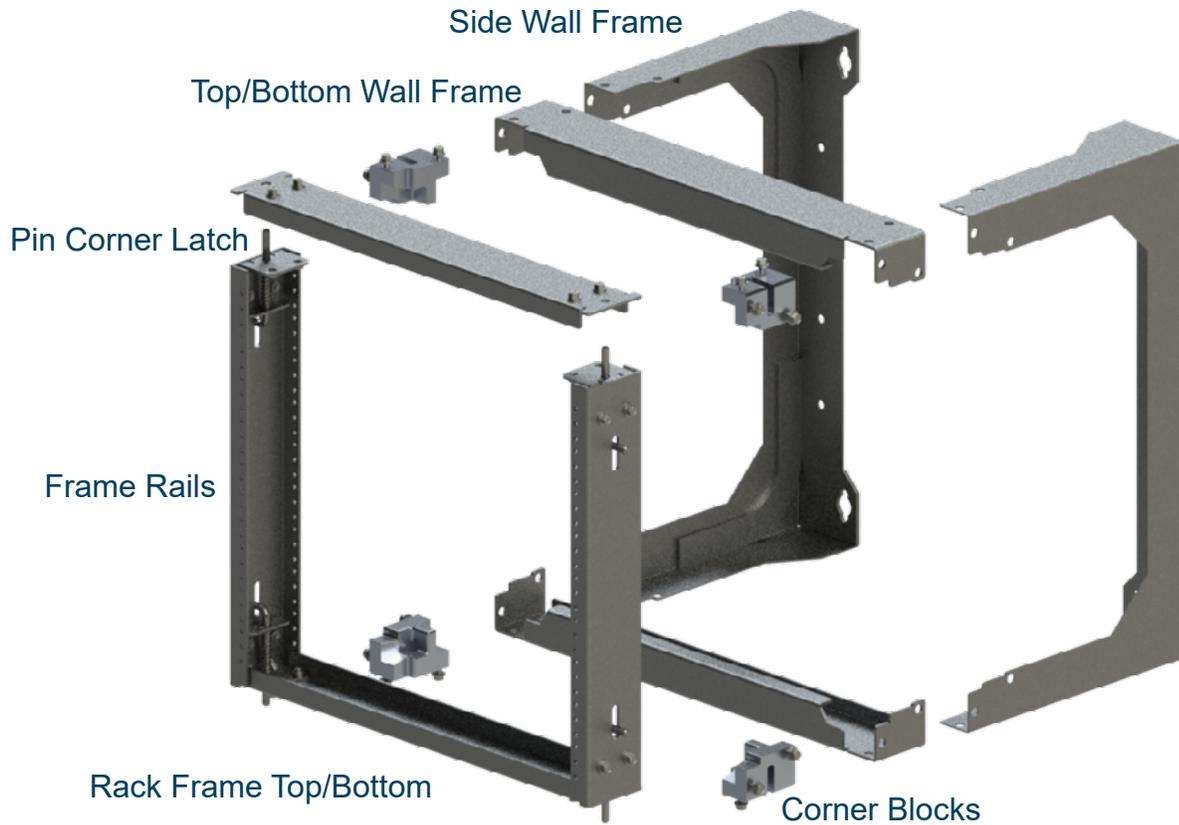

- (1) Assemble Wall Frame
 - Align Corner Holes of Side Wall and Top/Bottom Frame
 - Use Corner Blocks + bolts on each corner securing the frame
 - Mount to desired wall
 - Exact hole locations on Configuration Spec
- (2) Assemble Rail Frame
 - Using bolts attach Pin Corner Latch to Rail Frames
 - Make sure L pins enters slot
 - Complete squaring rail frame with Top/Bottom
 - Make sure pins protrude through top/bottom holes
- (3) Retract Pins and insert Rail Frame into Wall Frame

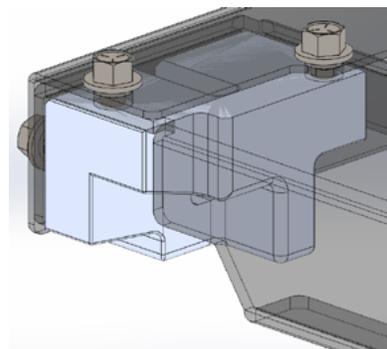

ORDERING INFORMATION

4	7	5	0	-	Color	Rack Units (A)	Overall Height (B)	Overall Depth (C)	Usable Depth (D)
					WH	06	16.25"	12	10"
					BK	12	26.75"	18	16"
					GR	18	37.25"	24	22"
						24	47.75"		

Included

- (1) Rack Frame
- (4) Corner Blocks
- (1) Back Wall Frame
- (1) Hardware Kit
 - (16) 1/4"-20 Bolt
 - (50) #12-24 Rack Mounting Screws